


Terminal Topjob 6mm 3 Conductor Grey

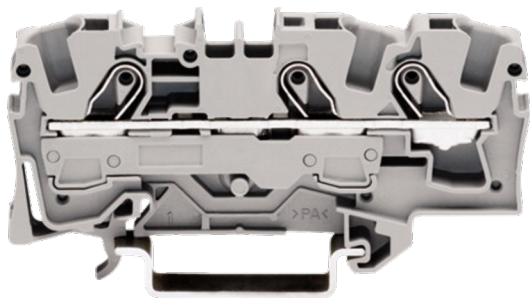

Representative Photo Only  
(actual product may vary based on configuration selections)

- Self-contained cage clamp assembly allows for quick and easy wire termination while ensuring contact quality
- Cage clamp terminals developed to suit a wide range of wire cross sections from 0.08 – 35mm<sup>2</sup>
- Alternate or staggered jumpers made in the field by simply breaking and removing jumper contacts
- Wide variety of terminal sizes and configurations including multiple conductors and decks, earth, sensor, high-current, fused and disconnect terminals
- Modular PCB terminal strips with cage clamp connection in various sizes and pin-spacing to suit any PCB solution
- Multi-connection system and WINSTA plugs and sockets suitable for lighting, power, and control connections
- Full range of accessories to complement any wire-termination solution

**SPECIFICATIONS**

Product Series	2006
Component Type Termination Wiring	Terminal
Number of Conductors	3 qty
Number of Potentials	1
Connection / Termination	Cage Clamp Terminal(s)
Material, Body / Housing	Nylon / PA6 / PA66 (Polyamide 6) material
Colour, Body / Housing	Grey colour
Flammability Rating (UL94)	UL 94 V-0
Conductor Entry Position	Front
Conductor Entry Angle	Horizontal
Wire / Conductor Size, Rigid Cable, Min	0.5 mm <sup>2</sup> min
Wire / Conductor Size, Rigid Cable, Max	10 mm <sup>2</sup> max
Wire / Conductor Size, Flex Cable, Min	0.5 mm <sup>2</sup> min
Wire / Conductor Size, Flex Cable, Max	10 mm <sup>2</sup> max
Wire Strip Length, Min	13 mm
Wire Strip Length, Max	15 mm
In, Rated Current	41 A
Un, Nominal Voltage	800 V
Rated surge voltage	8 kV
Pollution Degree	3
Marking Position	Centre / Side
Fire Load	0.196 MJ
Mounting	DIN-35 Rail Mount
Ex i Suitable	No
IECEX Certified	Yes
Marking 1	Ex e II
Marking 2	Tamb -55 °C to +85 °C
Protection Method(s) - Gas	Increased Safety "e"

# Catalogue No: **2006-1301**

## SCREWLESS TERMINAL 6mm 3 CONDUCTOR 41A GREY

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screwless > WAGO Screwless Terminals > Series 2006 - 6mm2 TOPJOB S Terminals > Series 2006 - Through Terminals



Certificate Number	IECEX PTB 05.0014U
Certificate URL	<a href="http://iecex.iec.ch/iecex/IECEXWeb.nsf/CoCHistory/IECEX%20PTB%2005.00141">http://iecex.iec.ch/iecex/IECEXWeb.nsf/CoCHistory/IECEX%20PTB%2005.00141</a>
Ex e, Un, Rated Voltage	550 V
Ex e, In, Rated Current	36 A
Ex e, In, Rated Current with Jumper	33 A
Height	73.5 mm
Width	7.5 mm
Depth	33 mm
Weight	0.011845 kg
Standards Compliance	EN 60947-7-1 IEC 60947-7-1
Certifications	CCA CSA GOST-R KEMA PTB RoHS UL
Shipping Approvals	ABS (American Bureau of Shipping) DNV-GL (Det Norske Veritas Germanischer Lloyd) Lloyd's Register of Shipping PRS (Polish Register of Shipping)


### REFERENCES

IECEX Certificate	IECEX PTB 05.0014U
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	<a href="#">20061301_Manufacturer Catalogue</a>

Catalogue No: **2006-1301**

**SCREWLESS TERMINAL 6mm 3 CONDUCTOR 41A GREY**

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screwless > WAGO Screwless Terminals > Series 2006 - 6mm2 TOPJOB S Terminals > Series 2006 - Through Terminals

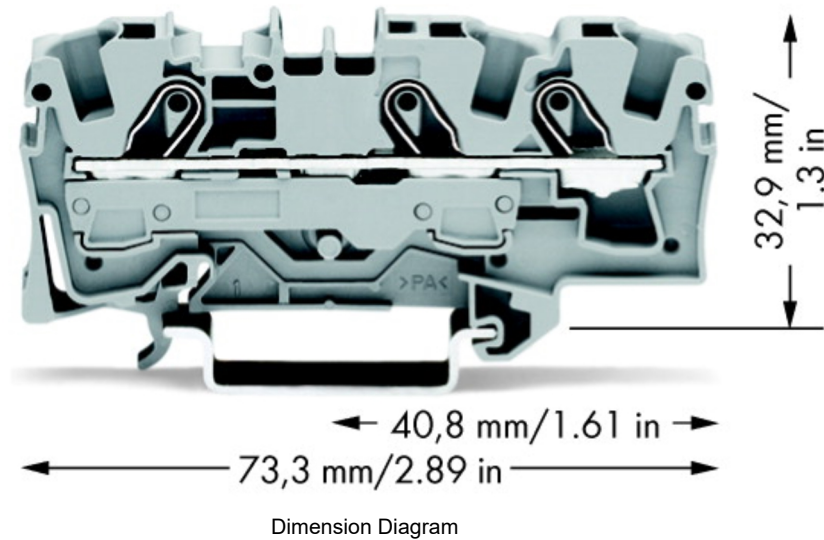

Connection / Wiring Diagram